ATC SURVEILLANCE MINIMUM ALTITUDE CHART - ICAO

AERODROME ELEV
EPWA 362 ft
EPMO 344 ft
EPRA 625 ft

Warszawa APPROACH	125.055, 128.805, 129.380, 135.930	Modlin TOWER	123.930
Okęcie TOWER	118.305	Radom TOWER	118.430
		MIL Radom APPROACH	128.675
		MIL Radom TOWER	118.430

TRANSITION ALTITUDE
6500 ft

TMA WARSZAWA

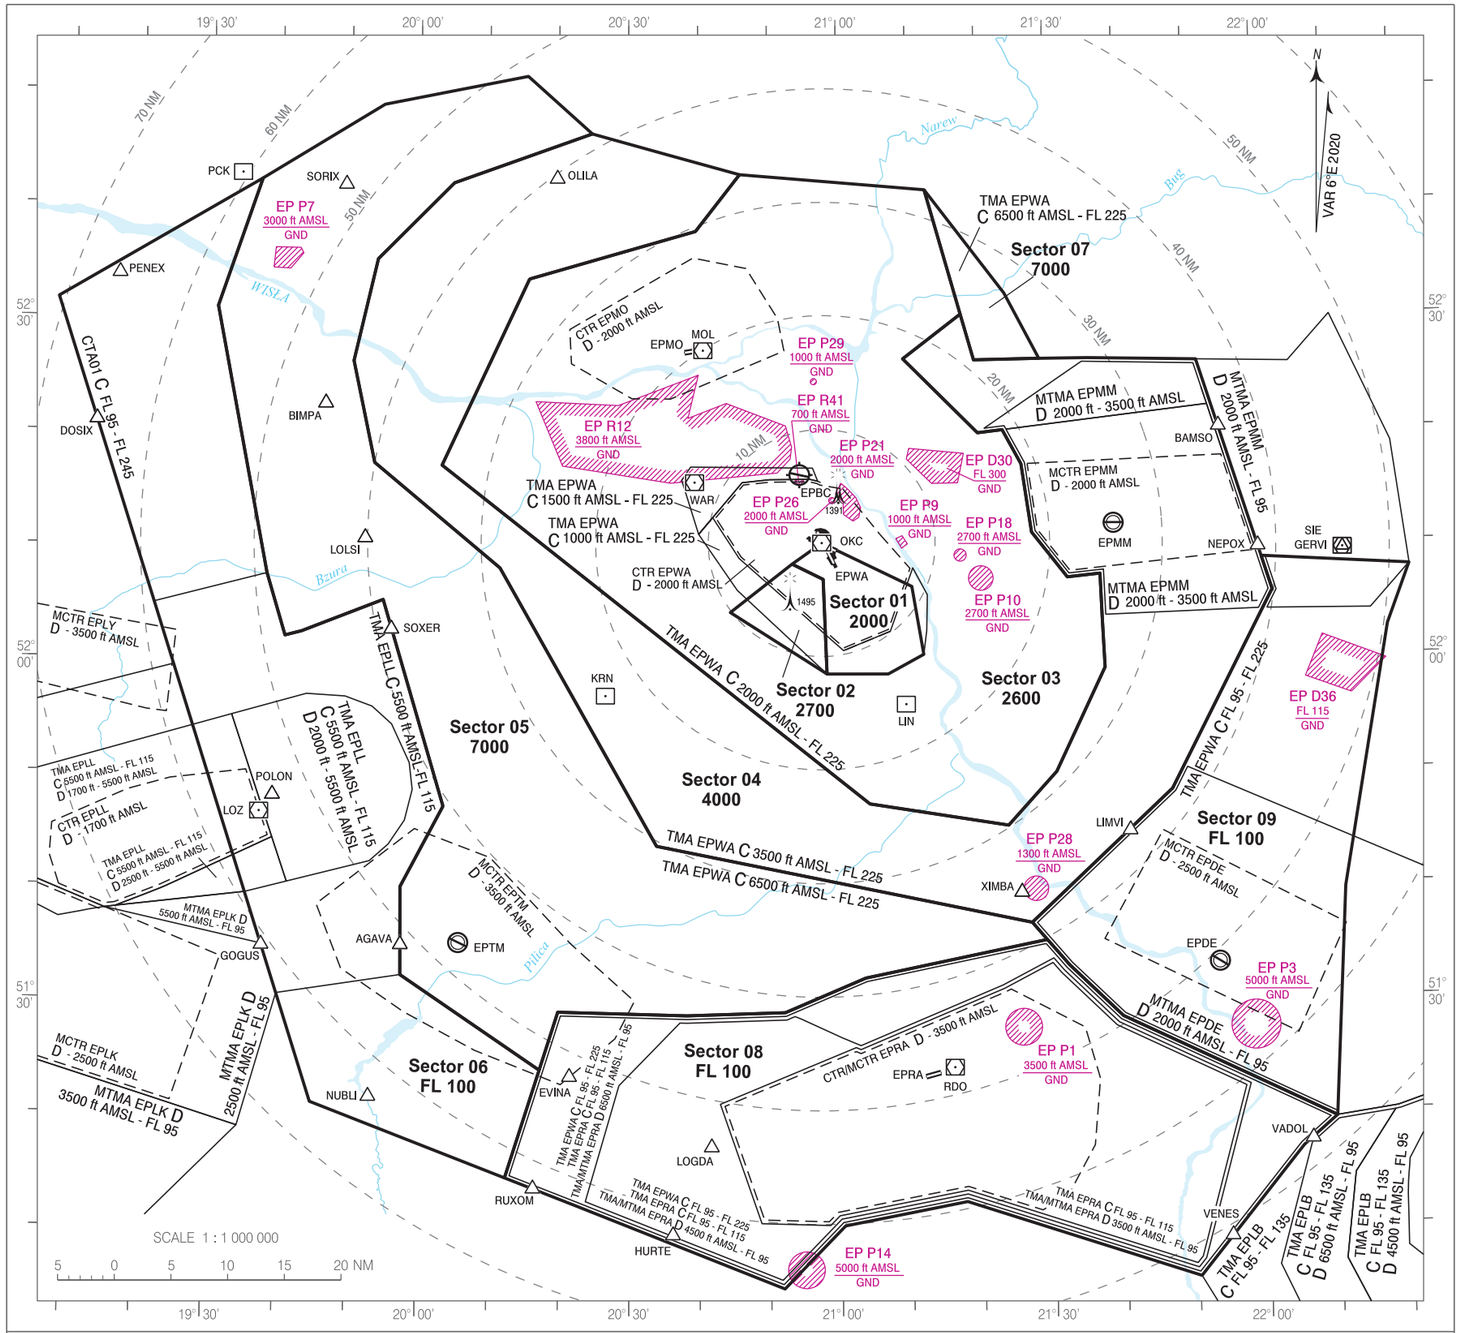

GENERAL INFORMATION:

1. Elevations and Minimum Vectoring Altitudes are indicated in feet.
2. Minimum Vectoring Altitudes ensure obstacle clearance within the area concerned plus a 3.0 NM buffer area up to 20 NM from ARP or 5.0 NM for distances greater than 20 NM.
   Minimum Vectoring Altitude is determined by the highest obstacle elevation or the highest terrain elevation +328 FT whichever is higher, plus safety margin of 984 FT in non-mountainous areas or 1969 FT in designated mountainous areas rounded up to the next hundred feet.
3. Minimum Vectoring Altitudes ensure a buffer of 500 FT above lower limit of controlled airspace.
4. Minimum Vectoring Altitudes Sectors do not constitute controlled airspace.
5. TEMPERATURE CORRECTION: Minimum Vectoring Altitudes are temperature corrected down to -10 degrees Celsius.
6. This chart may be only used for cross-checking of altitudes assigned while the aircraft is identified.
7. Coordinates of Minimum Vectoring Altitudes Sectors are listed overleaf.

Correction: FREQ changed.

©POLISH AIR NAVIGATION SERVICES AGENCY