INSTRUMENT APPROACH CHART - ICAO

AERODROME ELEV 148 ft
THR RWY 31 ELEV 136 ft
HEIGHTS RELATED TO THR 31

Oksywie APPROACH	134.000
Oksywie TOWER	119.850
ATIS	125.780

OKSYWIE
TACAN
RWY 31 (CAT A/B/C/D/E)

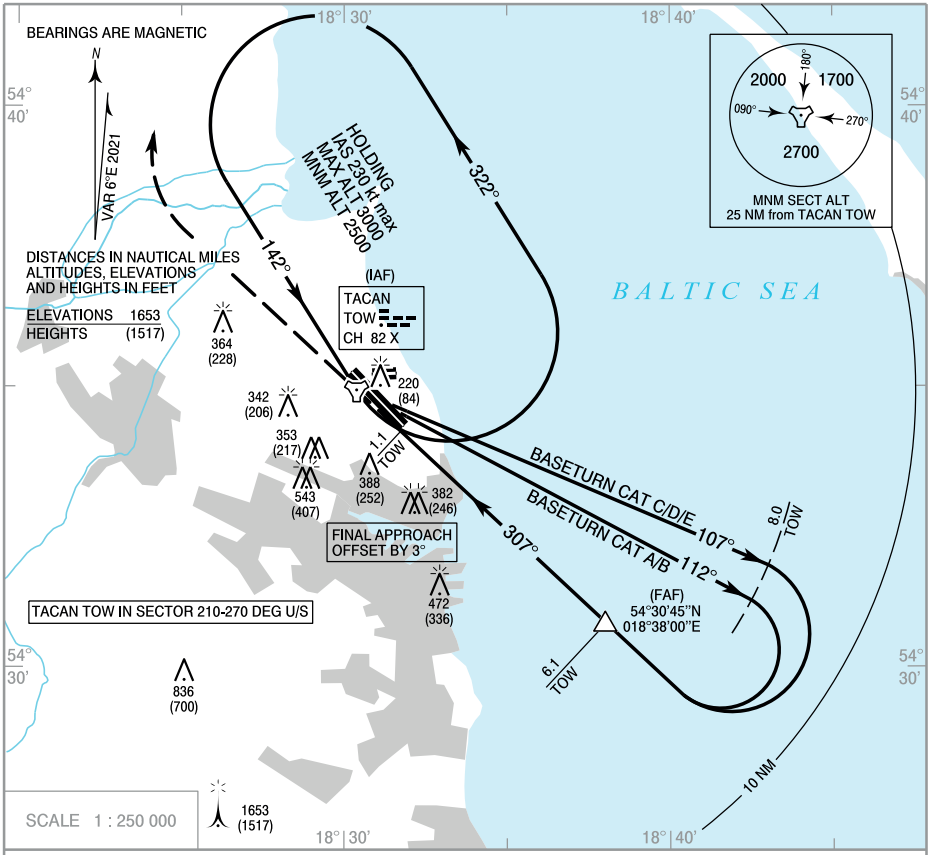

Correction: ATIS FREQ added.

MISSED APPROACH

Climb straight ahead to 1200 (1064)
then turn right to TACAN TOW
climbing to 2500 (2364)
and follow ATC instructions.

TRANSITION ALTITUDE 6500

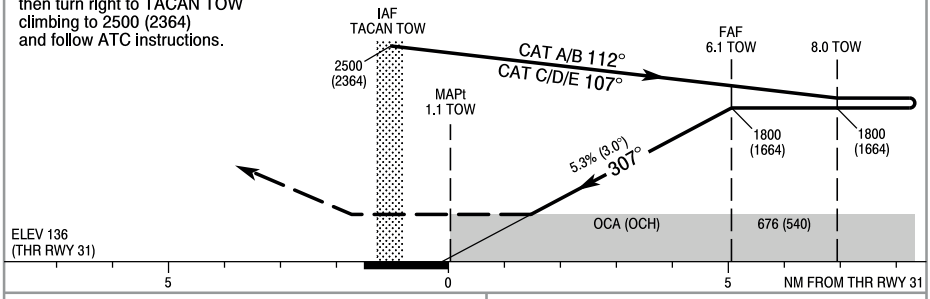

OCA (OCH)						
Cat. of ACFT	A	B	C	D	E
Straight-in	676 (540)	676 (540)	676 (540)	676 (540)	676 (540)
Circling* (OCH AAL)	838 (690)	848 (700)	948 (800)	1018 (870)	1338 (1190)

*Circling for RWY 31/13 and RWY 26/08

Distance FAF - MAPt 5.0 NM							
Speed	kt	70	100	135	170	200	230
Time	min : s	4 : 15	3 : 00	2 : 15	1 : 45	1 : 30	1 : 20
Rate of descent	ft / min	370	530	710	890	1050	1210

Dist. to TOW	6.1	6.0	5.0	4.0	3.0	2.6
Altitude	1800	1770	1455	1140	825	676

©POLISH AIR NAVIGATION SERVICES AGENCY

INSTRUMENT APPROACH CHART - ICAO

OKSYWIE
TACAN
RWY 31 (CAT A/B/C/D/E)

FIX / POINT	LATITUDE	LONGITUDE	FIX FORMATION	
IAF TACAN TOW	54°34'56.1"N	018°30'23.2"E		
FAF	54°30'45.0"N	018°38'00.0"E	133.44° GEO (127° MAG) TACAN TOW	6.10 NM TACAN TOW
MAPt	54°34'12.5"N	018°31'42.6"E	133.44° GEO (127° MAG) TACAN TOW	1.06 NM TACAN TOW
Final approach descent angle: 3.00°				

© POLISH AIR NAVIGATION SERVICES AGENCY